




D10mm NA0.23 Collimating Lens

Key Parameters

Diameter=10mm

NA=0.23

EFL=19mm / BFL=17mm

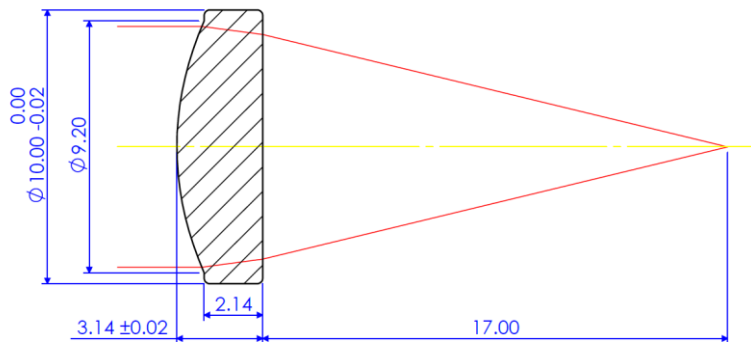

Application

Laser Collimation / Laser Pointer / Laser Tag / Laser Sensing
Industrial Areas / Biochemical / Laser Measurement

Feature

- ◆ Aspherical Molding Glass Lens
 - For high temperature, low deformation, good reliability and abrasive resistance
- ◆ NA0.23 for divergent angle to 27 °
- ◆ General dimension size and big N.A. for bigger divergent angle collimation

Introduction

Aspherical lenses are lenses with surfaces which are not a portion of sphere. Aspherical lenses are more superior in many applications than conventional lenses. One well designed aspherical lens can have the same or better performance than multiple spherical lenses. Therefore it reduces the number of lenses in one optical system and makes system lighter and more compact. Nowadays, by advanced high technology of production, aspherical lens has been successfully made in large quantity and meanwhile the cost is competitive against conventional high grade optical system. We provide various kinds of aspherical lenses. This document shows the specification of lens used in laser collimating. Besides the off-the-shelf lenses, customized lenses are also feasible based on customer's requirements.





Specifications	
Material	OHARA, L-BAL42
Diameter(mm)	10.0 0.00/-0.02
Design Wavelength(nm)	915
Clear Aperture(mm)	8.2
EFL(mm)	19±1%
BFL(mm)	17±1%
N.A.	0.23
Center Thickness(mm)	3.14 ± 0.02
AR Coating(Optional) R<1%	400-700nm
	600-1050nm
AR Coating(Optional) R<3%	500-850nm
Decentering	< 3 mins
Wavefront Aberration	RMS <0.05 λ
Surface Quality	40/20

The technical drawing shows a lens with a convex front surface and a flat back surface. The outer diameter is labeled as $\phi 9.20$. The clear aperture (CA) is labeled as $\phi 8.80$. The center thickness is labeled as 3.14 ± 0.02 . The diameter of the lens body is labeled as $\phi 10.00 - 0.02$. There are also labels for 2.14 and 3.14 ± 0.02 indicating specific thickness measurements.

Package

